PROJECTION TESTS*

Room completely dark






Direct artificial light on screen








Artificial light from ceiling



Compact fluorescent lamps 55w Color temperature - 4000 Kelvin - n.2 pcs



* Tested with projector EPSON EH-LS10000 (1.500 Al)

REAR LUX R114

REAR PROJECTION (NON PERFORATED)




PVC based translucent, matt surface, weldable.

Suitable for all dimensions and video formats.

Can be used for nearly all projection conditions.

To be used in projections where **high gain** is required.

Limited hot spot.

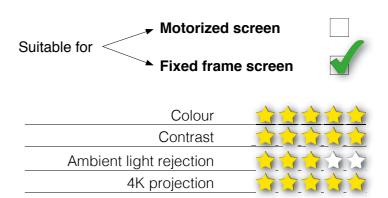

Technical specifications

GAIN	2.5
VIEWING ANGLE HALF GAIN	70°
ROLLER HEIGHT (cm)	300
THICKNESS (mm)	0,25
WEIGHT (gr/sqm)	367
FIRE PROOF CERTIFICATION	NFPA 701