

The **FLOORSTANDS** for **FLATMAX** are entirely made of black aluminium and are suitable for FlatMax frame screens.

FLOORSTANDS FOR FLATMAX

WIDTH OF FLATMAX SCREEN	QUANTITY OF FLOORSTANDS NEEDED	FLOORSTANDS AVAILABLE for following SCREEN FORMATS *
500 cm.	2	4:3 - 16:9 - 16:10
600 cm.	3	4:3 - 16:9 - 16:10
700 cm.	3	16:9 - 16:10
800 cm.	3	16:9 - 16:10


* Maximum total height of floorstand available: 600 cm.

STEP 1



Assemble the complete FlatMax screen with its cloth.

STEP 2

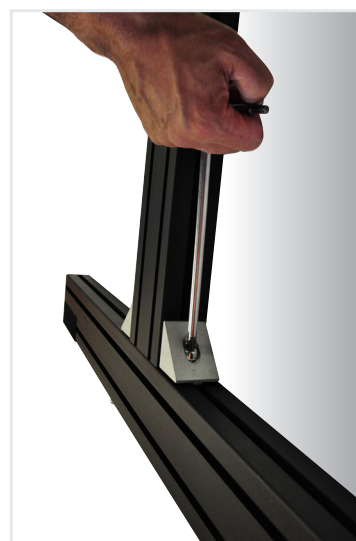

Mount the vertical part of the floorstand to the horizontal part that goes on the floor.

STEP 3



Take each mounted floorstand and fix it to the rear side of the vertical frame part of the FlatMax.

Each floorstand leg has to be fixed very tightly (using the included mounting brackets) at the rear side of the frame.

This step has to be made both for right and left floorstand.

For large screens from 600 cm. of width on, which need three legs, the central floorstands has to be always mounted at the rear side of the frame but fixed both on the upper and lower horizontal frame parts of the FlatMax.



FIXING OF THE UPPER PART OF THE FRAME



UPPER PART OF THE FRAME FIXED TO THE FLOORSTAND



MOUNTING OF CENTRAL FLOORSTAND FOR FLATMAX SCREENS from 600 cm. of width on



LOWER PART OF THE FRAME FIXED TO THE FLOORSTAND