


LOW VOLTAGE CONTACT INTERFACE

The **LOW VOLTAGE CONTACT INTERFACE** can be used to control an electric screen or projector lift by low voltage contact closures and/or via permanent switcher.

- Power supply 230V a.c.± 10% 50Hz
- Maximum output current 5Acosφ1,4 / 2Acosφ 0.4
- Output voltage on contacts 5/6/7 230 Vac / 50Hz
- Total interface dimensions 46x46x37 mm. (WxDxH)
- Box total dimensions 52x54x54 mm. (WxDxH)
- Terminals' size 2.5 mm²
- Satisfies all the technical regulations applicable to the product within the scope of Council Directives:

EN55014-1:2006+A1:2009+A2:2011 EMC
 EN55014-2:1997+A1:2001+A2:2008 EMC
 EN6100-3-2:2006+A2:2009 EN61000-3-3:2008 EMC
 EN60335-1:2012+A11:2014 EN60335-2-103:2005+A1:2008
 Direttiva 2014/30/EU
 Direttiva 2014/35/EU

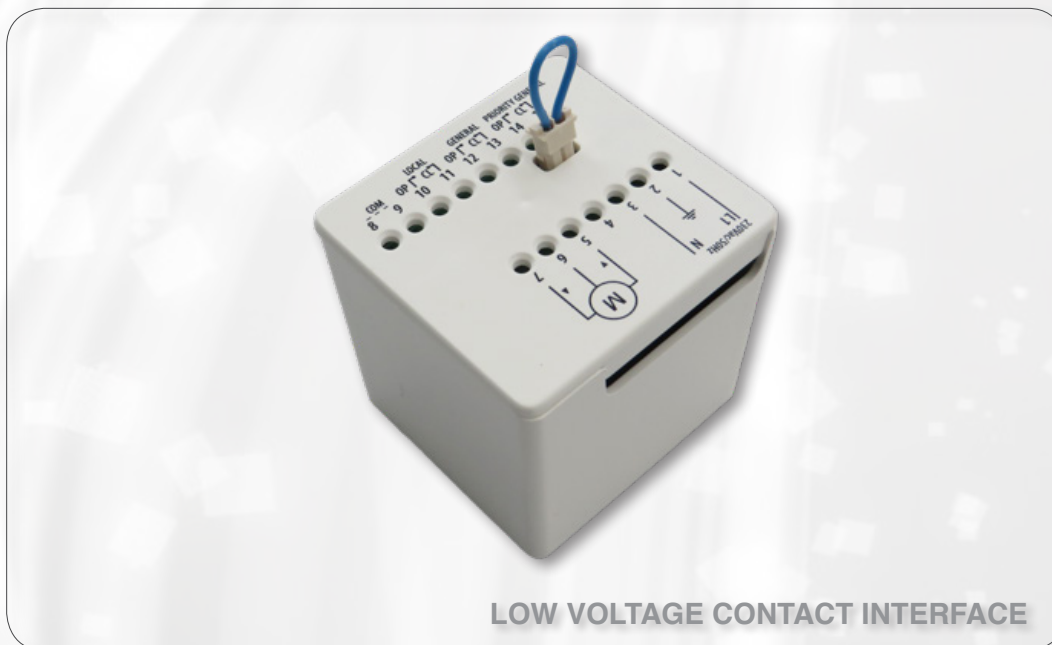

Dimension: **52x54x54 mm (WxDxH)**

EUROSCREEN S.r.l.

Via Stiria, 45/16 - 33100 Udine - Italy

Tel. +39 0432 522755

info@screenint.com

www.screenint.com

