




GIOTTO HOME CINEMA is the most innovative UPGRADABLE electric in-ceiling projection screen on the market. Its mechanical construction makes it an ideal and unique solution for in-ceiling installations both in residential and AV professional environments.

The Giotto is easy to mount and has the **possibility to install the roller tube with projection cloth after the installation is finished.**

This peculiar feature allows also to easily substitute the projection surface if required by the customer for maintenance reasons or necessity to upgrade the projection cloth.

This model has black side borders 5 cm. of width, 5 cm. black bottom border and a black top drop of 30 cm. included.

Available in 4:3, 16:9 and 16:10 formats or bespoke sizes.

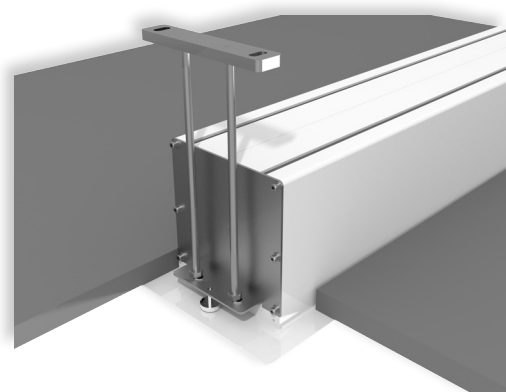

LEFT SIDE VIEW



n.2
Ceiling
mounting
brackets



n.1
On/off
switcher

INCLUDED



Kit RF Remote
control with
external
receiver



Interface
switch 12 volt



Low voltage
contact
interface




Nm 9
Rpm 26

Faster
motor


OPTIONAL pag 62-63




CEILING BRACKET

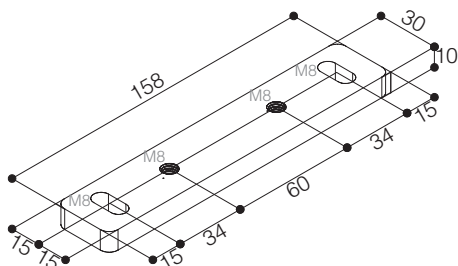



DIMENSIONS OF THE HOLE TO BE MADE IN THE FALSE CEILING

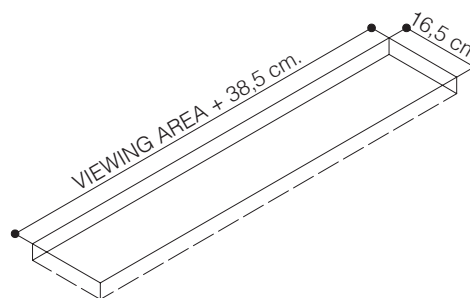

HOUSING SIDE VIEW

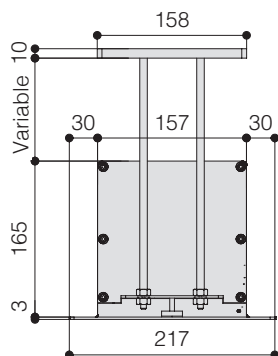

HOUSING FRONT VIEW

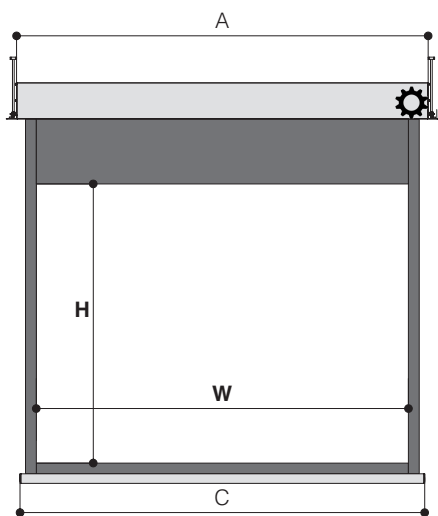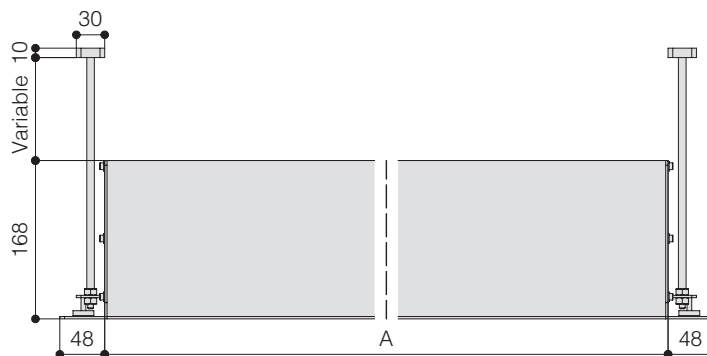

TECHNICAL SPECIFICATIONS

- Silent motor system provides a smooth and quiet operation
- Power: **7 Nm**
- Speed: **18 rpm**
- Power supply: **230V / 50 Hz**
- Consumption: **120 W**
- Certification: **IMQ**
- Housing manufactured from aluminium
- Lower part of the housing, trap door and bezel sprayed with white epoxy powders (RAL 9010)
- Black dowel bar: height 44 mm. - depth 17 mm.
- Two ceiling mounting brackets with four threaded rods 100 cm. long
- On/Off switcher included
- Flame retardant projection surfaces - classification M1, M2 and B1
- Side black borders of 5 cm. width, black bottom border of 5 cm. and black top drop of 30 cm.
- Minimum height required in the false ceiling: 17 cm
- Screen housing available in different colours (*optional*)

The measures in the drawings are expressed in millimetres.

DIMENSIONS measures in cm

4:3 Ratio Viewing area (WxH)	16:10 Ratio Viewing area (WxH)	16:9 Ratio Viewing area (WxH)	Overall dimensions A - C	Approx. net weight (Kg)
160 x 120	160 x 100	160 x 90	190,5 - 174	24
180 x 135	180 x 112	180 x 101	210,5 - 194	27
200 x 150	200 x 125	200 x 112	230,5 - 214	30
220 x 165	220 x 137	220 x 124	250,5 - 234	33
250 x 190	250 x 156	250 x 140	280,5 - 263	37
300 x 225	300 x 187	300 x 169	330,5 - 314	45
350 x 265	350 x 219	350 x 197	380,5 - 364	52
400 x 300	400 x 250	400 x 225	430,5 - 414	60
-	450 x 281	450 x 253	480,5 - 464	67

PROJECTION CLOTHS

Front projection surfaces	Gain	
White	1.2	
Matte White	1.2	
Lumi Grey	0.8	
Microperforated	1.1	
Lumi-Grey Microperforated	0.8	
Cinesound*	0.7	
Fibre Matte*	1.25	
Ultra HD*	1.2	
Bright Contrast 3D 0.8*	0.8	

*Limited in height

Warranty: 5 years on the motor - 24 months on the other components

